



Gas Station Complete Solution

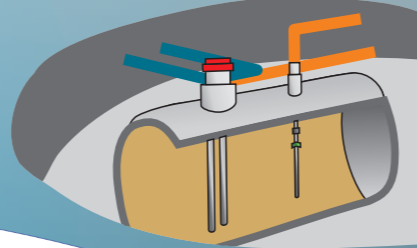

Fuel Dispenser

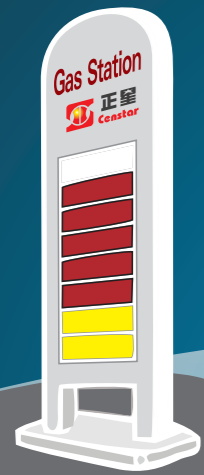

LPG, CNG, LNG Dispenser



EV Charger



Heavy Duty Dispenser



Vapor Recovery System



Gas Station & Convenience Store Management System



Smart Tank Truck Management System

Automatic Tank Gauge System




Skid Filling Station for LPG



Skid Filling Station for Fuel



Double Layer Tank



Underground Pipeline System


Censtar Science & Technology Corp. Ltd.
 Add: Hi-new Technology Industry Development
 Zone, Zhengzhou City, Henan Province, China
 Tel:+86-371-67989006
 E-mail: sales@censtar.com
 http://www.censtar.com



XMAN Series Fuel Dispenser



HIGH SECURITY SECURED  **WATERPROOF AND DUSTPROOF**

-  6200 Main Board: Latest Electronic Technology, More Safety and Stability
-  Intelligent Voice Broadcast System, Printer Bill System, Full-service Customers
-  Adjustable Display: Brightness can be adjusted according to the light
-  Pos Smart Upgrade Simply Maintenance
-  High-precision Flow Meter: Shell use unique technical processing, moistureproof, rustproof, All the advanced design assure outstanding performance no malfunctions within 5,000,000 liters, life-cycle can reach 10,000,000 liters and wide temperature adoption from -40°C-55°C

Available Options

- International Solenoid Valve
- International Brand Nozzle
- Breakaway and Swivel
- IC Card Payment Terminal
- English Receipt Printer
- Stainless Steel Arm Side and Canopy



Technical Parameters:

- Accuracy: ±0.25%
- Flow Rate Range: 5-50L/Min or 8-80L/Min
- Intake Vacuum: ≥54KPA
- Display: sales 0.00 to 99999999
- Noise: ≤80dB(A)
- Volume: 0.00 to 99999.99
- Unit Price: 0.00 to 99999 (Decimal point position can be chosen)
- Electrical Totalizer: 0.00 to 99999999.99
- Electrical Mechanical Totalizer: 0.00 to 99999999
- Power Supply: AC380V or AC220V with a changing range from -15% to +10%
- Motor's Output Power: 750W and 1000W
- Working Environmental Temperature: -40°C to +55°C
- Relative Humidity: 30% to 90%

X MAN Series Fuel Dispenser



Configuration Table (X MAN)

Model	Pump Type	Nozzle	Oil product	Display	Flow Rate (L/Min)		
CS30J1110G	Gear Pump	1	1	1	5-50	8-80	120
CS30J2120G		2	1	2	5-50		
CS30J2220G		2	2	2	5-50	8-80	
CS30J1110F	Vane pump	1	1	1	5-50		
CS30J2120F		2	1	2	5-50		
CS30J2220F		2	2	2	5-50		
CS30D1110F	Submersible Pump	1	1	1	5-50	8-80	120
CS30D2120F		2	1	2	5-50	8-80	
CS30D2220F		2	2	2	5-50	8-80	
Net Size:1076*460*2070mm (L*W*H)					Package Size:1122*520*2225mm (L*W*H)		